

BIRCH, STEWART, KOLASCH & BIRCH, LLP

INTELLECTUAL PROPERTY LAW

8110 GATEHOUSE ROAD

SUITE 500 EAST

FALLS CHURCH, VA 22042-1210

USA

(703) 205-8000

FAX (703) 205-8050

(703) 698-8590 (G IV)

e-mail: mailroom@bskb.com

web: http://www.bskb.com

CALIFORNIA OFFICE  
COSTA MESA, CALIFORNIA

TERRELL C. BIRCH  
RAYMOND C. STEWART  
JOSEPH A. KOLASCH  
JAMES M. SLATTERY  
BERNARD L. SWEENEY\*  
MICHAEL K. MUTTER  
CHARLES GORENSTEIN  
GERALD M. MURPHY, JR.  
LEONARD R. SVENSSON  
TERRY L. CLARK  
ANDREW D. MEIKLE  
MARC S. WEINER  
JOE MCKINNEY MUNCY  
ROBERT J. KENNEY  
DONALD J. DALEY  
JOHN W. BAILEY  
JOHN A. CASTELLANO  
GARY D. YACURA

OF COUNSEL  
HERBERT M. BIRCH (1905-1996)  
ELLIOT A. GOLDBERG\*  
WILLIAM L. GATES\*  
EDWARD H. VALANCE  
RUPERT J. BRADY (RET.)\*  
P. PRINCE BUTLER  
FRED S. WHISENHUNT  
\*SUBMITTED TO A BAR OTHER THAN VA

THOMAS S. AUCHTERLON  
JAMES T. ELLER, JR.  
SCOTT L. LOWE  
MARK J. NUELLE, Ph.D.  
D. RICHARD ANDERSON  
PAUL C. LEWIS  
MARK W. MILSTEAD\*  
RICHARD J. GALLAGHER  
JAYNE M. SAYDAH\*  
HYUNG N. SOHN  
ALAN PEDERSEN-GILES  
KECIA J. REYNOLDS

REG. PATENT AGENTS  
FREDERICK R. HANDREN  
MAKI HATSUMI  
MIKE S. RYU  
CRAIG A. McROBBIE  
GARTH M. DAHLEN, Ph.D.  
ROBERT E. GOODNER, Ph.D.  
MATTHEW J. LATTIG  
TIMOTHY R. WYCKOFF  
KRISTIL L. RUPERT, Ph.D.  
LARRY J. HUME  
ALBERT K. LEE  
HARVEY A. SAYADIAN, Ph.D.  
EVE L. FRANK, Ph.D.  
MATTHEW T. SHANLEY

11/21/00  
09/16/27  
U.S. PTO

Date: November 21, 2000

Docket No.: 0465-0766P-SP

Assistant Commissioner for Patents  
Box PATENT APPLICATION  
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application of

Inventor(s): KWON, Il Gun  
HWANG, Ji Yeon

For: OSD DEVICE AND METHOD FOR DISPLAYING MENU THEREIN

Enclosed are:

- X A specification consisting of 36 pages
- X 7 sheet(s) of Formal drawings
- X An assignment of the invention
- X Certified copy of Priority Document(s)
- X Executed Declaration X Original      Photocopy
- Applicant claims small entity status in accordance with 37 CFR 1.27
- Application Data Sheet in accordance with 37 C.F.R. 1.76
- Preliminary Amendment
- Information Disclosure Statement, PTO-1449 and reference(s)

\_\_\_ Other \_\_\_\_\_

\_\_\_ Applicant requests early publication

The filing fee has been calculated as shown below:

LARGE ENTITY				SMALL ENTITY	
FOR	NO. FILED	NO. EXTRA	RATE FEE		RATE FEE
BASIC FEE	*****	*****	*****	or	*****
	*****	*****	***** \$710.00		***** \$355.00
	*****	*****	*****		*****
TOTAL CLAIMS	35 - 20 =	15	x18 =\$ 270.00	or	x 9 = \$ 0.00
INDEPENDENT	4 - 3 =	1	x80 =\$ 80.00	or	x 40 = \$ 0.00
MULTIPLE DEPENDENT CLAIM PRESENTED <u>no</u>			+270 = \$ 0.00	or	+135 = \$ 0.00
			TOTAL \$1,060.00		TOTAL \$ 0.00

X A check in the amount of \$1,100.00 to cover the filing fee and recording fee (if applicable) is enclosed.

\_\_\_ Please charge Deposit Account No. 02-2448 in the amount of \$\_\_\_\_\_. A triplicate copy of this transmittal form is enclosed.

\_\_\_ No fee is enclosed.

If necessary, the Commissioner is hereby authorized in this, concurrent, and future replies, to charge payment or credit any overpayment to Deposit Account No. 02-2448 for any additional fees required under 37 C.F.R. 1.16 or under 37 C.F.R. 1.17; particularly, extension of time fees.

Respectfully submitted,

BIRCH, STEWART, KOLASCH & BIRCH, LLP

By 

JOSEPH A. KOLASCH

Reg. No. 22,463

P. O. Box 747

Falls Church, Virginia 22040-0747

[illegible]

## BACKGROUND OF THE INVENTION

### Field of the Invention

The present invention relates to a display device and more particularly, to a method for displaying a menu on an On Screen Display device.

### Background of the Related Art

On Screen Device (OSD) displays information to aid in the operation of the display on a screen. Accordingly, an OSD device may be implemented a TV receiver and other devices with a screen such as a video cassette recorder and a computer.

In a method for displaying an OSD on a TV receiver, menus are successively displayed on TV screen according to user selections input through a selecting device such as an operation panel or a remote control. Generally, a main menu is displayed including option items or control functions available on a TV receiver. If a user selects an item from the main menu, sub-menu items are displayed according to the selected item.

Typically, as a sub-menu is displayed, the main menu which had previously been displayed disappears and only the sub-menu items of the selected main menu item are displayed on the screen. Thereafter, when the user selects a menu item from the sub-menu, a sub-menu or a function control window corresponding to the selected sub-menu item can be displayed on the screen. Thus, a user can select and control a function of the TV receiver using the selecting device.

However, in the method of displaying an OSD as described above, the relation between the main menu items and sub-menu items cannot easily be understood at a glance because the main menu disappears when a sub-menu is displayed. Therefore, if a particular function is not displayed by a sub-menu item, a user must search for the function by returning and selecting different menu items, which would be inconvenient to a user as well as a waste of time.

Accordingly, another method in the related art suggests displaying a plurality of main menu items in a first region of the TV screen and displaying sub-menu items of a selected main menu item in a second region of the TV screen. Here, the second region is outside of and different from the first region. As a result, the main menu items and the sub-menu items can simultaneously be displayed in the first and second regions of the screen. Thus, a user can see relations between the main menu items and the sub-menu items, eliminating some of the disadvantages of the unnecessary coming back and forth between the main menu and sub-menus.

However, the above method is a stepwise display method, and would require a third and possibly a fourth separate display regions on the screen if the menu items have more than two levels of sub-menus. Moreover, since a display screen has a limited area as well as limits on legible sizes of characters or graphics for an OSD, displaying more than two separate regions on the

screen may be difficult.

#### SUMMARY OF THE INVENTION

Accordingly, an object of the present invention is to solve at least the problems and disadvantages of the related art.

5 An object of the present invention is to provide a more user friendly OSD display.

Another object of the present invention is to provide an OSD display which permits an efficient display of many OSD menu items on a limited area of a screen.

10 Additional advantages, objects, and features of the invention will be set forth in part in the description which follows and in part will become apparent to those having ordinary skill in the art upon examination of the following or may be learned from practice of the invention. The objects and  
15 advantages of the invention may be realized and attained as particularly pointed out in the appended claims.

To achieve the objects and in accordance with the purposes of the invention, as embodied and broadly described herein, a method for displaying a menu using an OSD device includes  
20 displaying a plurality of OSD main menu items on a screen, opening a space between adjacent main menu items through a selecting device, and displaying at least one sub-menu item belonging to the main menu item in the opened space.

In another embodiment of the present invention, a method for

displaying a menu using an OSD device includes (1) displaying a plurality of OSD first menu items in a first region of a screen and displaying an item indicator using a menu selecting device, (2) opening a space between a selected first menu item and a first menu item adjacent the selected first menu item when a first menu item is selected using the item indicator, (3) displaying at least one sub-menu item of the selected first menu item in the opened space, (4) erasing the displayed at least one sub-menu item from the screen and closing the space when the item indicator is set to select a new second item from the main menu (5) opening a space between the second menu item and a menu item adjacent the second menu item, and (6) displaying at least one sub-menu item of the second menu item in the new space.

In still another embodiment of the present invention, a method for displaying a menu using an OSD device includes (1) displaying a plurality of OSD first menu items in a first region of a screen using a menu selecting device and displaying an item indicator, (2) opening a space between a selected first menu item and a first menu item adjacent the selected first menu item when a first menu item is selected using the item indicator, (3) displaying at least one OSD second menu item corresponding to a sub-menu of the selected first menu item in the opened space, (4) displaying a function control window for a selected second menu item in a second region of the screen when the item indicator is set to select a second menu item, and (5) selecting and executing

a desired function in the function control window using the menu selecting device and the item indicator.

In a further embodiment of the present invention, an OSD device includes a storage for storing a plurality of OSD first menu items, a data on at least one second menu item corresponding to a sub-menu item of each of the first menu items, and a system program; a screen device for displaying the OSD menus; a selecting device for generating an item indicator on the screen, moving a cursor between menus displayed on the screen, and selecting a desired menu; and a controller for displaying the first menu items on the screen device, opening a space between the selected first menu item and a menu item adjacent to the selected first menu item, and displaying at least one second menu item corresponding to the sub-menu of the selected first menu item in the opened space of the screen device.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The invention will be described in detail with reference to the following drawings in which like reference numerals refer to like elements wherein:

FIG. 1 is a block diagram of a TV receiver having an OSD device in accordance with the present invention;

FIG. 2 is a view of a remote controller according to the present invention;

FIGS. 3 to 5 are flow charts showing a process for



displaying menus in accordance with the present invention; and

FIGS. 6 to 9 show example display of screens having menu(s) in accordance with the present invention.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

5           Reference will now be made in detail to the present invention, examples of which are illustrated in the accompanying drawings. Generally, an OSD device and method for displaying a menu according to the present invention can be implemented in different displays such as TV receivers, VCRs, and camcorders. However, for purpose of explanation, the present invention will be explained with reference to a TV receiver. Accordingly, FIG. 1 is a block diagram of an OSD device implemented in a TV receiver to display a menu in accordance with the present invention applied thereto.

15           Referring to FIG. 1, a TV receiver includes an antenna 1, a tuner 2, an audio/video switch 3, a NTSC decoder 4, a video processor 5, a video forwarder 6, a Cathode Ray Tube (CRT) 7, a memory 8, a remote controller 9, and a controller 10. In the present embodiment, the memory 8 is implemented by a Dynamic Random Access Memory (DRAM) 8a and a Flash Read On Memory (FROM) 8b. Also, the controller 10 includes a central processing unit (CPU) 10a, an Intermediate Frequency (I/F) processor 10b, an InfraRed (I/R) signal receiver 10c, and an I/R signal decoder 10d.

Here, an OSD device 11 may be implemented by a combination of the CRT 7 as the screen, the memory 8, the remote controller 9 as the selecting device, and the controller 10. The operation of the TV receiver shown in FIG. 1 will next be explained.

5        When the I/R signal receiver 10c receives an I/R code signal from the remote controller 9, the I/R signal decoder 10d analyses the I/R code signal and forwards results of the analysis to the CPU 10a. The CPU 10a then executes a program stored in the FROM 8b according to the forwarded results.

10        For example, if the I/R code signal is a command to select a new channel, the results would indicate a change of channel and the CPU 10a would tune the necessary frequency signals from the antenna through the tuner 2 to receive the broadcasting signal corresponding to the selected channel. Also, the CPU 10a  
15        controls the audio/video switch 3 to receive only the TV signal among the different input sources. The signal which passes through the audio/video switch 3 is luminance/color (Y/C) signals. The Y/C signals received are converted into R/G/B signals through the NTSC decoder 4, modified into a display  
20        format through the video processor 5, and transferred to the CRT 7 through the video forwarder 6.

      If the I/R code signal is for a command to display a menu, the results would indicate a display of menu items on the screen. The CPU 10a would then allocate a region of the DRAM 8a according  
25        to a system program corresponding to the display of menu items

and generates a virtual image of the menu items within the allocated region in a bit map form. Here, the bit map is the OSD menu items. Thereafter, the bit map generated by the DRAM 8a is transferred to the video processor 5 through a data bus, and the video processor 5 combines a video signal from the NTSC decoder 4 and an OSD data from the DRAM 8a to form a combined video. Finally, the combined video to the CRT 7 through the video forwarder 6.

Particularly, the memory 8 is the storage which stores a plurality of first OSD menu items, data on at least one second menu item corresponding to sub-menu items of each of the first menu item, and the system program. The CRT 7 is the screen which displays the OSD menus. The remote controller 9 is the selecting device through which a cursor generated on the screen can be moved between the displayed menus to select a menu. Accordingly, the controller 10 displays the first menu items on the screen using the system program in response to a signal from the selecting device, and allocates a display region by opening a space between a selected first menu item and a first menu item adjacent to the selected first menu item. At least one second menu item corresponding to a sub-menu of the selected first menu item would then be displayed in the display region.

FIG. 2 shows an embodiment of a remote controller according to the present invention including a power switch, a first region 70, a second region 75, and a third region 76. The first region

70 includes a plurality of input keys such as buttons to designate the type of source to be processed by the TV receiver. Namely, a TV 71 is for selecting a TV signal input through a RF jack, a Video1 72 and Video2 73 are for selecting a composite video input through an RCA jack and audio L/R, respectively, a DVD 74 is for selecting a video and audio signals provided through an external terminal on the TV receiver for Y/Cr/Cb components.

The second region 75 includes input keys for the basic operations of a TV receiver such as changing a channel, controlling the volume, muting, and sleep programming.

The third region 76 includes input keys related to the display and selection of menu items. Accordingly, the third region 76 would closely relate to the present invention. Particularly, in a state when a video image is being displayed on the screen, the selection of a menu 77 would display menu items, i.e. the first menu items, on the screen. On the other hand, when menu items are already being displayed, the selection of the menu 77 would return the screen back to a previous screen. For example, if the menu 77 is entered while OSD sub-menu items are being displayed, the screen would return to display an upper menu level such as the main menu items. Also, if the menu 77 is entered while main menu items are being displayed or Exit 78 is entered, menu items are removed and the screen returns to video images such as a TV programming.

An Enter 79 is an input key for selecting a menu item or function displayed on the screen. For example, assuming that first level menu items, i.e. main menu items, are being displayed, if a user moves a cursor to one of the first level menu item and enters the Enter 79, the sub-menu items corresponding to the selected first menu item would be displayed on the screen. Namely, at least one second level menu item, i.e. a sub-menu item, of the selected first menu item would be displayed.

Furthermore, if the user moves the cursor to one of the second menu items and enters the Enter 79, a third level menu corresponding to the selected second menu items would be displayed. Here, the third menu items may be a lower level of sub-menu items or a function control window. If a function control window is displayed, the user can select and control operations of the TV receiver such as brightness, hue, and contrast.

In the above operations, direction input keys 80 ~ 83 moves the cursor up, down, left, or right among the displayed menu items. Also, the user may use the direction input keys 80 ~ 83 to point to select one of the displayed menu items or control values of TV functions.

Accordingly, a selecting device includes direction input keys to allow a user to manipulate and control items displayed on the screen; and an Enter key which allows a user to select one

of the displayed menu items. In addition, although the explained embodiment of the selecting device is a remote controller, other selecting device may be used such as a panel integrated to the OSD device, a keyboard connected to the OSD with a line, or a mouse connected to the OSD with a line.

Different embodiments of the present OSD device and method will next be explained. Generally, a plurality of OSD first menu items are successively displayed on a screen. The selecting device may then be manipulated to open a space between a selected first menu item and a first menu item adjacent to the selected first menu item. At least one second menu item corresponding to selected first menu item would be displayed in the opened space.

Here, the opened space begins continuously from the selected first item to a first item adjacent to the selected item. Also, the space may open simultaneously to display the second menu items as a first menu item is selected through the detecting device. Alternatively, the space may slide open within a predetermined time period to display second menu items when a first menu item is selected. Thereafter, when the cursor is moved to point at or select a new first menu item, the opened space displaying the second menu items closes, and a new space between the newly selected first menu item and a first menu item adjacent the new first menu item is opened to display sub-menu items corresponding to the new menu item.

The menu items items may be displayed from top to bottom,

left to right of the screen. Also, like second menu items, the first menu items may simultaneously be displayed or slide open within a predetermined time period to display the first menu items, when requested through a selecting device. Furthermore, the menu items of different levels may be displayed in different colors and/or different luminances, or may be displayed in same colors and same luminances.

For example, assume that a screen has a first color and a first luminance, that the first menu items have a second color and a second luminance, and that the second menu items have a third color and a third luminance. The first to third colors may be the same and the first to third luminances may be the same. Alternatively, the first to third colors may be different and the first to third luminances may be different. Namely, the second luminance may be brighter than the first luminance, but darker than the third luminance. Still alternatively, the second color may be the same with the third color, but different from the first color while the first to third luminances may be different. Here, the second luminance may also be brighter than the first luminance and darker than the third luminance. While only a few examples are illustrated, other combinations of colors and luminances may be implemented and made possible by the manufacturer.

In addition, the space in which menu items are displayed on the screen may be transparent or translucent such that a user can

continue to view a regular TV program through the displayed menu while selecting a function. As in the color and luminance, the menus of different levels may be displayed in the same or different levels of transparency. For example, the main menu can be opaquely displayed while sub-menus or function windows are transparently displayed.

The first embodiment of the OSD device and method will now be explained with reference to FIG. 3 ~ 5.

In the first embodiment, a plurality of OSD first menu items are displayed in a first region of a screen together with an item indicator such as a cursor. If a user, through a selecting device, moves a cursor to point at and selects a OSD first menu item, a space between the selected first menu item and a first menu item adjacent to the selected first menu item is opened. At least one OSD second menu item corresponding to the selected first menu item is then displayed in the opened space. Here, the selected first menu item has a brighter luminance compared to other first menu items when the second menu items corresponding to the selected first menu item is being displayed.

Thereafter, if the user moves the cursor to point at and selects one of the displayed second menu items, at least one OSD third menu item or a function control window, corresponding to the selected second menu item is displayed, depending on the type of the selected second menu item. Here, the third menu items are displayed in an open space between the selected second menu item



and a second menu item adjacent to the selected second menu item. However, a function control window is displayed in a second region of the screen. Thus, a user can operate the selecting device to further select a menu item or select a function to control, depending on the selected second menu item.

FIG. 3 is a flow chart showing a process for displaying menus in a first menu level in accordance with the first embodiment of the present invention and FIG. 4 is a flow chart showing a process for displaying menus in a second menu level in accordance with the first embodiment of the present invention, and FIG. 5 is a flow chart showing a process for displaying menus in a third menu level in accordance with the first embodiment of the present invention.

Referring to FIGS. 2 and 3, when the menu 77 input key is entered or has been entered through a selecting device (120), a determination is made whether the menu 77 is newly entered or has been entered. If the menu 77 has been entered, menu items would already be displayed in a first region of the screen. Accordingly, either upper level menu items is displayed or the screen is returned to regular TV display if main menu items are displayed. If the menu 77 is newly entered, for example while a regular TV is being displayed, a process for displaying menu items starts and an initial menu screen with first menu items, i.e. main menu items, is displayed in a first region of the screen, in a preset order (121). When menu items are initially

displayed, the first of the first menu items is highlighted automatically, by default.

Once menu the items are displayed and if a command signal is received through the selecting device, a determination is made whether the command signal relates to a selection of a menu item (122). If the signal is not from a navigation key, the signals are disregarded until a signal from a navigation key is received. If the signal is from navigation keys such as direction input keys 80 ~ 83, the Enter 79, or the Exit 78, which relate to a menu selection, the status of the display on the screen is checked. Particularly, a determination is made whether the screen is in the first menu level displaying first menu items (123); a second menu level displaying second menu items, i.e. sub-menu items of the first menu item (124); or a third menu level displaying third menu items, i.e. sub-menu items of the second menu item or a function control window (125). For purposes of explanation, assume from hereon that the navigation keys are one of the direction input keys 80 ~ 83, the Enter 79 key, Menu 77 key, or the Exit 79 key.

Also assuming that the screen is in the first menu level, if a signal from one of the direction input keys 80 ~ 83 is received (126), the highlight is moved from a currently highlighted first menu item to a different first menu item according to a direction indicated by the received signal (129).

If a signal from a direction input key is not received, but Enter

79 signal is received (127), the currently highlighted first menu item is selected and a space between the selected first menu item and a first menu item adjacent to the selected first menu item is opened (130). Thus, at least one second menu item  
5 corresponding to the selected first menu item is displayed in the opened space, by a preset order.

As explained above, the space may open and display the second menu items simultaneously with the selection of a first menu item, or the space may slide open upon a selection of a  
10 first menu item to display the second menu items within a preset time period. Once the second menu items are displayed, the highlight may or may not move from the selected first menu item to a second menu item (131).

However, if the Menu 77 is entered (128), the screen returns  
15 to a state before the first menu level state (134). Namely, the displayed first menu items disappear from the screen to display a regular TV program. Also, if the Exit 78 is entered (132), the menu selection ends and the screen returns to a state before the first menu level state, i.e. to the regular TV program (133).

20 Assuming now that the screen is determined to be in the second menu level in step 124 of FIG. 3, the process will be explained with reference to FIG. 4. As with the initial display of the first menu items, the first of the second menu items is highlighted automatically, by default when the second menu items  
25 are initially displayed.

If a signal from one of the direction input keys 80 ~ 83 is received (140), the highlight is moved from a currently highlighted second menu item to a different second menu item according to a direction indicated by the received signal (143).

5 If a signal from a direction input key is not received, but Enter 79 signal is received (141), the currently highlighted second menu item is selected and the screen enters the third menu level (144).

10 Here, if the third menu level is another sub-level menu item, then a space between the selected second menu item and a second menu item adjacent to the selected second menu item would be opened to display at least one third menu item. However, for purpose of explanation, assume from hereon that the third menu level is a function control window. Accordingly, if the third menu level is a function control window, the function control window is displayed in a second region of the screen, different from the first region containing the first menu items and the second menu items. Thereafter, the highlight moves from the first region to the second region and the first of the third menu items, i.e. function controls, is highlighted automatically, by default when the third menu items are initially displayed.

20 However, if the Menu 77 is entered (142), the screen returns to a state before the second menu level (145). Namely, the opened space between a selected first menu item and an adjacent first menu item closes, thereby the displayed second menu items

disappear from the screen to display the first menu items. Here, the highlight may remain with the previously selected first menu item, move to the adjacent first menu item, or move to the first of the first menu item as in the initial display. If the Exit  
5 78 is entered (146), the menu selection ends and the screen returns to the regular TV program (147).

Finally, assuming that the screen is determined to be in the third menu level in step 125 of FIG. 3, the process will be explained with reference to FIG. 5. In the present embodiment,  
10 the third menu level is a function window and a default item on the function control window would initially be highlighted.

Accordingly, if a signal from one of the direction input keys 80 ~ 83 is received (150), the highlight is moves within the function control window from a currently highlighted item to a  
15 different item according to a direction indicated by the received signal (153). Here, the item within the function control window may be a value which can be adjusted by a direction input key. If a signal from a direction input key is not received, but Enter  
79 signal is received (151), the currently highlighted second  
20 menu item is selected and the screen enters the second menu level (154). Thereafter, the function control window displayed in the second region disappears while the first menu items and the second menu items remain on the screen.

A selection of an item above means a storage of the item,  
25 if the item is a value of a function such as for the control of

brightness. On the other hand, for functions such as channel memorization, a selection of an item can either mean a storage of a channel or a deletion of a memorized channel.

If the Menu 77 is entered (152), the screen returns to a state before the third menu level (155). Namely, the second region containing the function control window closes. As in the second menu level, the highlight may remain with the previously selected second menu item, move to a second menu item adjacent to the selected second menu item, or move to the first of the second menu item. If the Exit 78 is entered (156), the second region with the function control window closes, the second region with the menu items closes, and the screen returns to the regular TV program (157).

In the present embodiment, further assume that the screen is displayed in a first color, the first menu items are displayed in a second color, the second menu items are displayed in a third color, and the function control window is displayed in a fourth color.

The first to fourth colors may be different and may have different luminances. In such case, the first to fourth colors may be set such that the luminance of the fourth color is the brightest, the luminance of the third color is less bright, the luminance of the second color is still less brighter, and the luminance of the first color is the least bright. Alternatively, the first to fourth colors may be identical while the luminances

are different. In this case, the first to fourth colors may also be set such that the luminance of the fourth color is the brightest, the luminance of the third color is less brighter, the luminance of the second color is still less brighter, and the luminance of the first color is the least bright

In addition, when the selecting device is operated by pointing or highlighting with the cursor to select a new first menu item while in a second menu level, the displayed second menu items are erased from the first region of the screen and the opened space is closed. Afterwards, a space between the newly selected first menu item and a first menu item adjacent to the newly selected first menu item is opened, and at least one second menu item corresponding to the newly selected first menu item is displayed in the opened space. Also, when a new second menu item is selected by pointing or highlighting with the cursor, the displayed function control window is erased from the second region of the screen and a function control window of the newly selected second menu item is displayed in the second region. In the preferred embodiment, the above process is executed smoothly and continuously.

FIG. 6 shows an example of a screen with an initial display of first menu items in the first region when a user enters a Menu input key. As shown, the first of the first menu item, i.e. "Set up," is highlighted in the initial display. Thereafter, the highlight (or cursor) can be moved by the direction input keys

80 ~ 83 of FIG. 2, and a highlighted item can be selected by the Enter 79 key.

FIG. 7 shows an example of the screen when the "Set up" is selected from the first menu items. Here, the second menu items corresponding to "Set up" are displayed between "set up" and the adjacent first menu item "video." Also, FIG. 7 shows a display of a function control window in a second region of the screen to "auto scan" when "auto scan" is selected from the second menu items.

FIG. 8 shows an example of the screen when "set up" is selected from the first menu items, "CH. Add/Del" is selected from the second menu items of "set up," and a function control window for "CH. Add/Del" is displayed in the second region. FIG. 9 shows an example of the screen when "video" is selected from the first menu items, "brightness" is selected from the second menu items, and a function control window for the selected "brightness" is displayed in the second region.

As shown in FIGS. 7 ~ 9, a selected first menu item and a selected second menu item may be displayed by two types of highlights. In the present example, the selected first menu item itself is highlighted while the selected second menu item is highlighted by a pointer.

In the first embodiment as described above, the display of menu items changes when a menu item highlighted or pointed by a cursor is selected through a Enter key on a selecting device.



However, in a second embodiment of the present invention, the display of menu items is changed simply by moving the cursor. Since the methods of the first and second embodiments are generally the same, the second embodiment will next be explained, with emphasis on the differences.

As in the first embodiment, a plurality of OSD first menu items are displayed in a first region of a screen together with a cursor. The cursor is initially positioned on a first of the first menu item. Thereafter, if a user moves a cursor and points or highlights a first menu item, a space between the highlighted first menu item and a first menu item adjacent to the highlighted first menu item is opened. At least one OSD second menu item corresponding to the highlighted first menu item is then displayed in the opened space. Assuming that the third menu level is a function control window, if the cursor is further moved and points or highlights a second menu item, a function control window corresponding to the highlighted second menu item is displayed in a second region of the screen. Thus, a function can be controlled using the selecting device and cursor.

Also, when the cursor is moved to point at a new first menu item while the screen is in the second menu level, the displayed second menu items are erased from the first region of the screen and the opened space is closed. Afterwards, a space between the newly selected first menu item and a first menu item adjacent to the newly selected first menu item is opened, and at least one

second menu item corresponding to the newly selected first menu item is displayed in the opened space. Similarly, when the cursor is moved to point at a new second menu item while the screen is in the third menu level, the displayed function control window is erased from the second region of the screen and a function control window of the newly selected second menu item is displayed in the second region. In the preferred embodiment, the above process is executed smoothly and continuously.

In the second embodiment, the space may open simultaneously with a selection of a menu item or may slide open gradually as in the first embodiment. Furthermore, the screen, the first menu items, the second menu items, and the fourth menu items may be displayed in different combinations of colors and luminances as in the first embodiment.

In a third method embodiment of the present invention, second menu items are displayed with a corresponding function control window, assuming that the third menu level is a function control window. As the method of the third embodiment is generally the same as the first embodiment, the third embodiment will also be described with emphasis on the differences.

According to the third embodiment, a plurality of OSD first menu items are also displayed together with a cursor. When the selecting device is operated to point the cursor and selects a first menu item, a space between the selected first menu item and a first menu item adjacent to the selected first menu item is

opened. At least one OSD second menu item corresponding to the selected first menu item is then displayed, where each of the displayed second menu item is displayed with a corresponding function control window. Thus, the selecting device can be operated to control a function of the TV.

In the above process, the space may open simultaneously with a selection of a menu item or may slide open gradually as in the first embodiment. Also, the screen, the first menu items, the second menu items, and the fourth menu items may be displayed in different combinations of colors and luminances as in the first embodiment. However, in the third embodiment, the function control window may also be displayed in a first region of the screen with the menu items rather than being displayed in a second region.

In the present embodiments, if a last of displayed menu items is selected, sub-menu items corresponding to the selected menu item may be displayed in a space beneath the selected menu rather than a space between the selected menu item and an adjacent menu item. Also, when second menu items corresponding to a first menu item is displayed, the second menu items may be displayed in a predetermined order, with a corresponding function control window. Moreover, if a second menu item corresponding to function control window is selected, the remaining second menu items which had not been selected may be erased from the screen.

In sum, the present OSD device and method for displaying a

menu displays sub-menu items in a limited space provided between main menu items and permits an effective use of a limited area of the screen. Also, a simultaneous display of main menu items and sub-menu items provides a convenient and user-friendly system for a user when selecting a menu.

The foregoing embodiments are merely exemplary and are not to be construed as limiting the present invention. The present teachings can be readily applied to other types of apparatuses. The description of the present invention is intended to be illustrative, and not to limit the scope of the claims. Many alternatives, modifications, and variations will be apparent to those skilled in the art.

What is Claimed is:

1. A method for displaying OSD menu items on a screen comprising:

displaying a first menu level having plurality of main menu  
5 items on a first region of the screen;

opening a space between a first main menu item and a second  
main menu item adjacent to the first main menu item; and

displaying, in the opened space, a second menu level having  
at least one sub-menu item corresponding to the first main menu  
10 item.

2. A method of claim 1, wherein in displaying the main menu  
items and the sub-menu items in a direction from the top to the  
bottom of the screen.

3. A method of claim 1, wherein displaying the main menu  
15 items and the sub-menu items in a direction from the left to the  
right of the screen.

4. A method of claim 1, wherein the main menu items are  
displayed simultaneously when a user request to display the first  
menu level is input through a selecting device.

20 5. A method of claim 1, wherein the main menu items are  
sequentially displayed within a predetermined time period when

a user request to display the first menu level is input through a selecting device.

6. A method of claim 1, wherein sub-menu items are continuously displayed, starting from a point at which a display of the first main menu item ends to a point at which a display of the second main menu item begins.

7. A method of claim 6, wherein the sub-menu items are displayed simultaneously when a user request to display the second menu level is input through a selecting device.

8. A method of claim 6, wherein the space slides open within a predetermined time period and the sub-menu items are sequentially displayed in the opened space as the space slides open, when a user request to display the first menu level is input through a selecting device.

9. A method of claim 1, wherein displaying the screen in a first color, displaying the main menu items in a second color, and displaying the sub-menu items in a third color; and wherein two of the first, second, or third colors are identical or all three of the first, second and third colors are different.

10. A method of claim 1, wherein displaying the screen in

a first luminance, displaying the main menu items in a second luminance, and displaying the sub-menu in a third luminance; and wherein two of the first, second, or third luminances are identical or all three of the first, second and third luminances are different.

11. A method for displaying a menu in an OSD device comprising:

(a) displaying a plurality of main menu items and an item indicator on a screen;

(b) opening a first space between a first main menu item and a second main menu item adjacent to the first main menu item when the first main menu item is selected using the item indicator;

(c) displaying, in the first space, at least one sub-menu item corresponding to the first main menu item;

(d) erasing the displayed at least one sub-menu item and closing the first space when a new main menu item is selected using the item indicator;

(e) opening a second space between the new main menu item and a main menu item adjacent to the new first main menu item; and

(f) displaying, in the second space, at least one sub-menu item corresponding to the new main menu item.

12. A method of claim 11, wherein a main menu item is

selected when a user positions the item indicator on a main menu item.

13. A method of claim 11, wherein a main menu item is selected when a user positions the item indicator on a main menu item and enters a selection key.

14. A method of claim 11, wherein the item indicator is one of either a highlight or a cursor.

15. A method of claim 11, wherein main menu items are displayed simultaneously on the screen when a user request a display of the main menu items through a selecting device.

16. A method of claim 11, wherein main menu items are sequentially displayed within a predetermined time period when a user request to display the first menu level is input through a selecting device.

17. A method of claim 11, wherein sub-menu items corresponding to a main menu item are displayed simultaneously when a user selects a main menu item using the item indicator.

18. A method of claim 11, wherein a space slides open within a predetermined time period and sub-menu items corresponding to



a main menu item are sequentially displayed in the slide opened space, when a user selects a main menu item using the item indicator.

19. A method for displaying a menu in an OSD device,  
5 comprising the steps of:

(a) displaying a plurality of main menu items in a first region of a screen when a user request a display of main menu items using an item indicator and a selecting device;

(b) opening a first space between a first main menu item and  
10 a second main menu item adjacent to the first main menu item when the first main menu item is selected using the item indicator and the selecting device;

(c) displaying, in the first space, at least one sub-menu item corresponding to the first main menu item;

(d) displaying a function control window corresponding to  
15 a selected sub-menu item in a second region of the screen, when a sub-menu item is selected using the item indicator and the selecting device; and

(e) controlling a function in the displayed function control  
20 window using the selecting device and the item indicator.

20. A method of claim 19, wherein the first main menu item is selected when a user positions the item indicator on the first main menu item.

21. A method of claim 19, wherein the first main menu item is selected when a user positions the item indicator on the first main menu item and enters a selection key on the selecting device.

5 22. A method of claim 19, wherein in (a), the plurality of main menu items are simultaneously displayed.

23. A method of claim 19, wherein in (a), the plurality of main menu items are sequentially displayed within a predetermined time period.

10 24. A method of claim 19, wherein in (c), sub-menu items corresponding to the first main menu item are displayed simultaneously when the user selects the first main menu item in (b).

15 25. A method of claim 19, wherein in (c), the first space slides open within a predetermined time period and sub-menu items corresponding to the first main menu item are sequentially displayed in the first space as the first space slides open, when the user selects the first main menu item in (b).

20 26. A method of claim 19, wherein displaying the screen in a first color, displaying the plurality of main menu items in a

second color, displaying the at least one sub-menu item in a third color, and displaying the function control window in a fourth color; and wherein at least two of the first, second, third or fourth colors are identical or all four of the first, second, third and fourth colors are different.

27. A method of claim 19, wherein displaying the screen in a first luminance, displaying the plurality of main menu items in a second luminance, displaying the at least one sub-menu item in a third luminance, and displaying the function control window in a fourth luminance; and wherein at least two of the first, second, third or fourth luminances are identical or all four of the first, second, third and fourth luminances are different.

28. A method of claim 19, further comprising:

(f) erasing the displayed at least one sub-menu item and closing the first space when a new main menu item is selected using the item indicator and the selecting device;

(g) opening a second space between the new main menu item and a main menu item adjacent to the new first main menu item; and

(h) displaying, in the second space, at least one sub-menu item corresponding to the new main menu item.

29. A method of claim 19, further comprising:

(f) erasing the displayed function control window from the second region of the screen when a new sub-menu item is selected using the item indicator and the selecting device; and

(g) displaying, in the second region, a function control window corresponding to the new sub-menu item.

30. A method of claim 19, wherein the selecting device is any one of a key panel, a remote controller, a keyboard or a mouse.

31. A method of claim 19, wherein the item indicator is one of either a highlight or a cursor.

32. An OSD device comprising:

a storage which stores a plurality of OSD main menu items, a data on at least one sub-menu item corresponding to each of the main menu items, and a system program;

a screen which displays the OSD menu;

a selecting device which allows a user to move an item indicator on the screen and to select a menu item using the item indicator; and

a controller which displays the main menu items from the storage on the screen device, opens a space between a main menu item selected through the selecting device and a main menu item adjacent to the selected main menu item, and displays at least

one sub-menu item corresponding to the selected main menu item in the opened space using the data stored in the storage.

33. An OSD device of claim 32, wherein the selecting device includes at least one direction key to move the item indicator  
5 and an enter key to select a menu item.

34. An OSD device of claim 32, wherein the selecting device is any one of a key panel, a remote controller, a keyboard or a mouse.

35. An OSD device of claim 32, wherein the item indicator  
10 is one of either a highlight or a cursor.

# ABSTRACT

An On Screen Display device and method for displaying a menu is disclosed. In the present invention, a plurality of OSD main menu items are displayed on a screen and a space between adjacent menu items is opened to display sub-menu items. Thus, a user can conveniently select a menu as the menu items and the sub-menu items are simultaneously displayed. Accordingly, a limited area of the screen can effectively be used to display more menus.

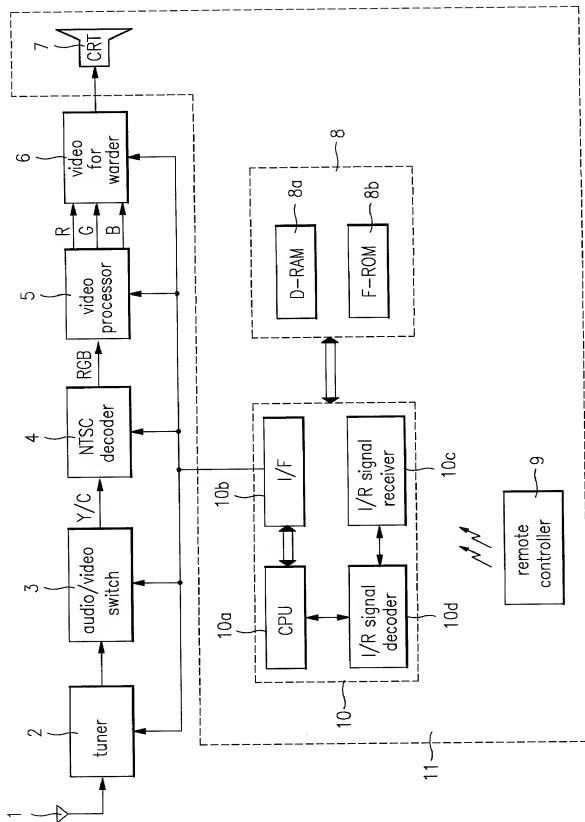
[illegible]

FIG.2

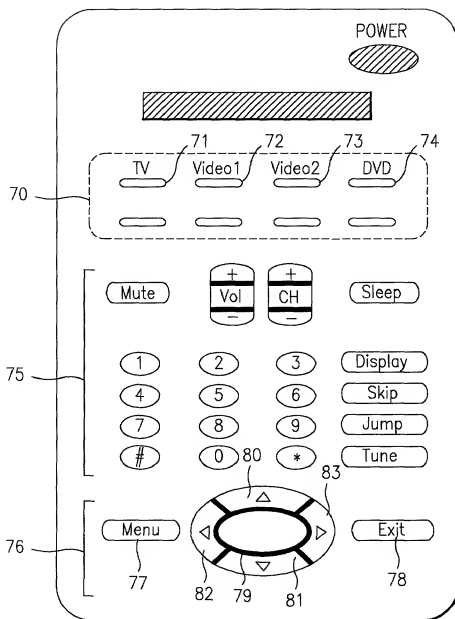




FIG.3

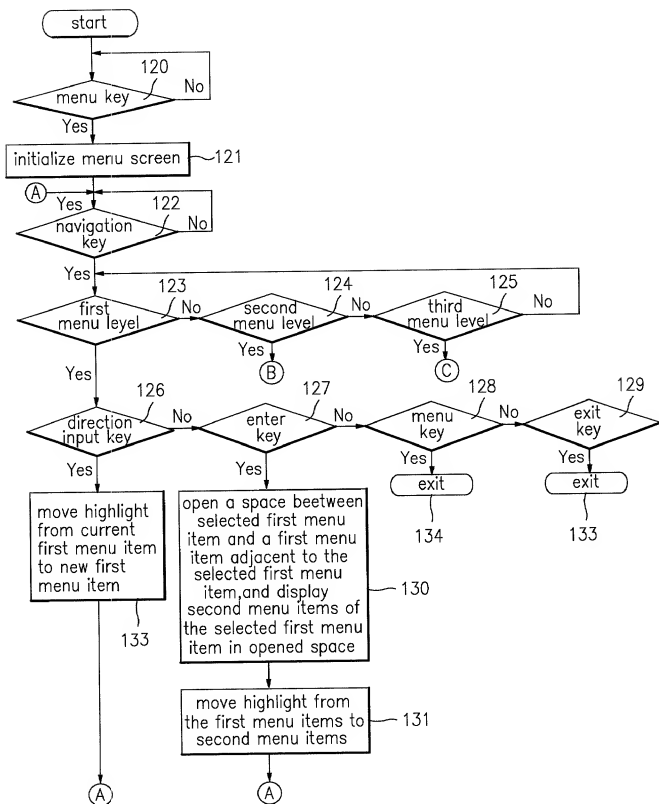


FIG.4

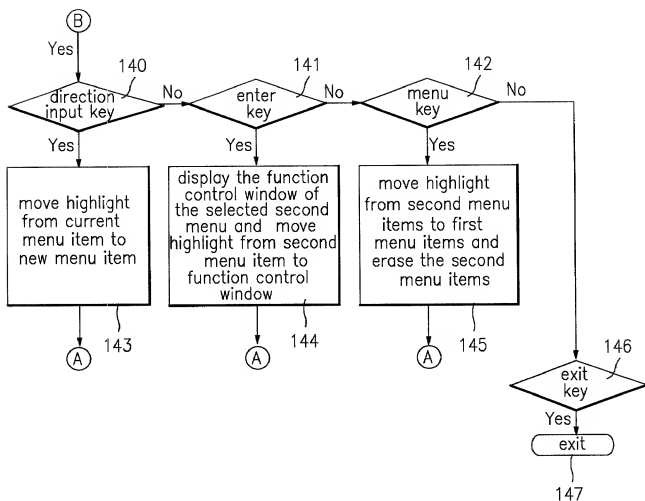


FIG.5

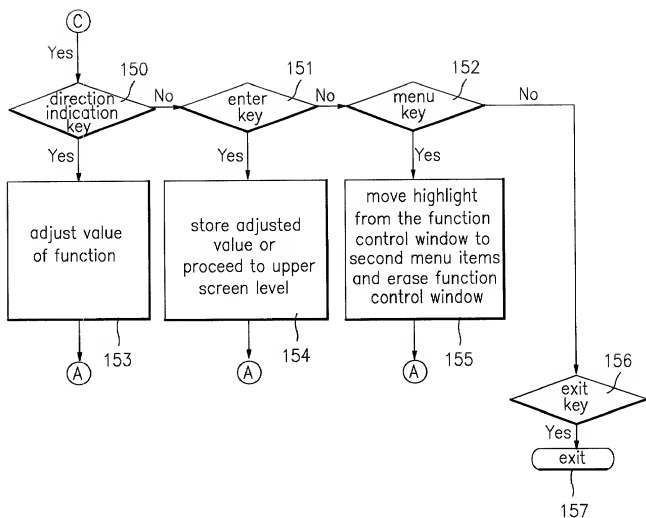


FIG.6

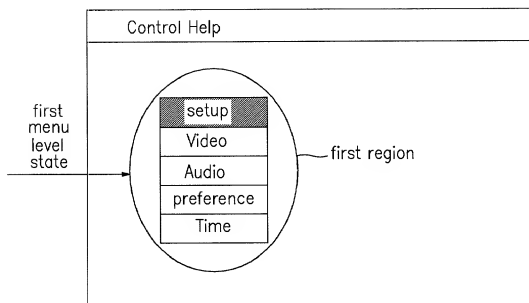


FIG.7

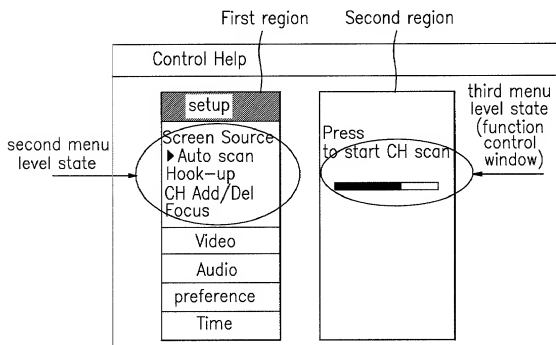



FIG.8

Control Help													
<div> <div>setup</div> <div>Screen Source</div> <div>Auto scan</div> <div>Hook-up</div> <div>▶CH Add/Del</div> <div>Focus</div> </div>	<div>CH Add/Del</div> <table border="1"> <tr> <td>PIP</td> <td>1 7 ... 37</td> </tr> <tr> <td></td> <td>2 8 38</td> </tr> <tr> <td></td> <td>3 9 39</td> </tr> <tr> <td>Help</td> <td>4 10 40</td> </tr> <tr> <td></td> <td>5 11 41</td> </tr> <tr> <td></td> <td>6 12 42</td> </tr> </table>	PIP	1 7 ... 37		2 8 38		3 9 39	Help	4 10 40		5 11 41		6 12 42
PIP	1 7 ... 37												
	2 8 38												
	3 9 39												
Help	4 10 40												
	5 11 41												
	6 12 42												
Video													
Audio													
preference													
Time													

FIG.9

Control Help	
<div> <div>Setup</div> <div>Video</div> <div>Brightness</div> <div>▶Contrast</div> <div>Sharpness</div> <div>Color</div> <div>Tint</div> </div>	<div>12 </div>
Audio	
preference	
Time	

## BIRCH, STEWART, KOLASCH &amp; BIRCH, LLP

P.O. Box 747 • Falls Church, Virginia 22040-0747  
 Telephone: (703) 205-8000 Facsimile: (703) 205-8050

PLEASE NOTE:  
 YOU MUST  
 COMPLETE THE  
 FOLLOWING

# COMBINED DECLARATION AND POWER OF ATTORNEY FOR PATENT AND DESIGN APPLICATIONS

As a below named inventor, I hereby declare that my residence, post office address and citizenship are as stated next to my name; that I verily believe that I am the original, first and sole inventor (if only one inventor is named below) or an original, first and joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

OSD DEVICE AND METHOD FOR DISPLAYING MENU THEREIN

Insert Title:

Fill in Appropriate  
 Information -  
 For Use Without  
 Specification  
 Attached

the specification of which is attached hereto. If not attached hereto,

the specification was filed on \_\_\_\_\_ as  
 United States Application Number \_\_\_\_\_  
 and amended on \_\_\_\_\_ (if applicable) and/or  
 the specification was filed on \_\_\_\_\_ as PCT  
 International Application Number \_\_\_\_\_; and was  
 amended under PCT Article 19 on \_\_\_\_\_ (if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 56.

I do not know and do not believe the same was ever known or used in the United States of America before my or our invention thereof, or patented or described in any printed publication in any country before my or our invention thereof or more than one year prior to this application, that the same was not in public use or on sale in the United States of America more than one year prior to this application, that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representative or assigns more than twelve months (six months for designs) prior to this application, and that no application for patent or inventor's certificate on this invention has been filed in any country foreign to the United States of America prior to this application by me or my legal representatives or assigns, except as follows.

I hereby claim foreign priority benefits under Title 35, United States Code, 19(a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

## Prior Foreign Application(s)

## Priority Claimed

Insert Priority  
 Information:  
 (if appropriate)

<u>55491/1999</u>	<u>Korea</u>	<u>December/7/2000</u>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
(Number)	(Country)	(Month/Day/Year Filed)	Yes	No
_____	_____	_____	<input type="checkbox"/>	<input type="checkbox"/>
(Number)	(Country)	(Month/Day/Year Filed)	Yes	No
_____	_____	_____	<input type="checkbox"/>	<input type="checkbox"/>
(Number)	(Country)	(Month/Day/Year Filed)	Yes	No
_____	_____	_____	<input type="checkbox"/>	<input type="checkbox"/>
(Number)	(Country)	(Month/Day/Year Filed)	Yes	No

I hereby claim the benefit under Title 35, United States Code, 19(e) of any United States provisional application(s) listed below.

Insert Provisional  
 Application(s)  
 (if any)

<u>(Application Number)</u>	<u>(Filing Date)</u>
_____	_____
<u>(Application Number)</u>	<u>(Filing Date)</u>
_____	_____

All Foreign Applications, if any, for any Patent or Inventor's Certificate Filed More than 12 Months (6 Months for Designs) Prior to the Filing Date of This Application:

Country	Application Number	Date of Filing (Month/Day/Year)
_____	_____	_____
_____	_____	_____

Insert Requested  
 Information:  
 (if appropriate)

I hereby claim the benefit under Title 35, United States Code, 20 of any United States and/or PCT application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States and/or PCT application in the manner provided by the first paragraph of Title 35, United States Code, 12. I acknowledge the duty to disclose information which is material to the patentability as defined in Title 37, Code of Federal Regulations, § 56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

Insert Prior U.S.  
 Application(s):  
 (if any)

<u>(Application Number)</u>	<u>(Filing Date)</u>	<u>(Status - patented, pending, abandoned)</u>
_____	_____	_____
<u>(Application Number)</u>	<u>(Filing Date)</u>	<u>(Status - patented, pending, abandoned)</u>
_____	_____	_____

## Attorney Docket No.

I hereby appoint the following attorneys to prosecute this application and/or an international application based on this application and to transact all business in the Patent and Trademark Office connected therewith and in connection with the resulting patent based on instructions received from the entity who first sent the application papers to the attorneys identified below, unless the inventor(s) or assignee provides said attorneys with a written notice to the contrary:

Raymond C. Stewart	(Reg. No. 21,066)	Terrell C. Birch	(Reg. No. 19,382)
Joseph A. Kolasch	(Reg. No. 22,463)	James M. Slattery	(Reg. No. 28,380)
Bernard L. Sweeney	(Reg. No. 24,448)	Michael K. Mutter	(Reg. No. 29,680)
Charles Gorenstein	(Reg. No. 29,271)	Gerald M. Murphy, Jr.	(Reg. No. 28,977)
Leonard R. Svensson	(Reg. No. 30,330)	Terry L. Clark	(Reg. No. 32,644)
Andrew D. Meikle	(Reg. No. 32,868)	Marc S. Weiner	(Reg. No. 32,181)
Joe McKinney Muncy	(Reg. No. 32,334)	Donald J. Daley	(Reg. No. 34,313)
John W. Bailey	(Reg. No. 32,881)	John A. Castellano	(Reg. No. 35,094)
Gary D. Yacura	(Reg. No. 35,416)		

Send Correspondence to:

**BIRCH, STEWART, KOLASCH & BIRCH, LLP** or Customer No. 2292  
P.O. Box 747 Falls Church, Virginia 22040-0747  
Telephone: (703) 205-8000 Facsimile: (703) 205-8050

PLEASE NOTE:  
YOU MUST  
COMPLETE  
THE  
FOLLOWING:

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of First  
or Sole Inventor  
Insert Name of  
Inventor  
Insert Date This  
Document is Signed

Insert Residence  
Insert Citizenship

Insert Post Office  
Address

Full Name of Second  
Inventor, if any  
see above

Full Name of Third  
Inventor, if any  
see above

Full Name of Fourth  
Inventor, if any  
see above

Full Name of Fifth  
Inventor, if any  
see above

GIVEN NAME/FAMILY NAME Il Gun KWON	INVENTOR'S SIGNATURE <i>Kwon Il Gun</i>	DATE* 2000. Nov. 11
Residence (City, State & Country) Seoul, Korea		CITIZENSHIP Republic of Korea
POST OFFICE ADDRESS (Complete Street Address including City, State & Country) Dongshin APT., Ga-207, Togokjel-dong, Kangnam-gu, Seoul, Korea		
GIVEN NAME/FAMILY NAME Ji Yeon HWANG	INVENTOR'S SIGNATURE <i>Jiyeon Hwang</i>	DATE* 2000. Nov. 11
Residence (City, State & Country) Seoul, Korea		CITIZENSHIP Republic of Korea
POST OFFICE ADDRESS (Complete Street Address including City, State & Country) Kangbyun APT., 1-405, Chamwon-dong, Socho-gu, Seoul, Korea		
GIVEN NAME/FAMILY NAME	INVENTOR'S SIGNATURE	DATE*
Residence (City, State & Country)		CITIZENSHIP
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)		
GIVEN NAME/FAMILY NAME	INVENTOR'S SIGNATURE	DATE*
Residence (City, State & Country)		CITIZENSHIP
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)		
GIVEN NAME/FAMILY NAME	INVENTOR'S SIGNATURE	DATE*
Residence (City, State & Country)		CITIZENSHIP
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)		